


WAFER CHECK VALVE – MODEL: FIG22

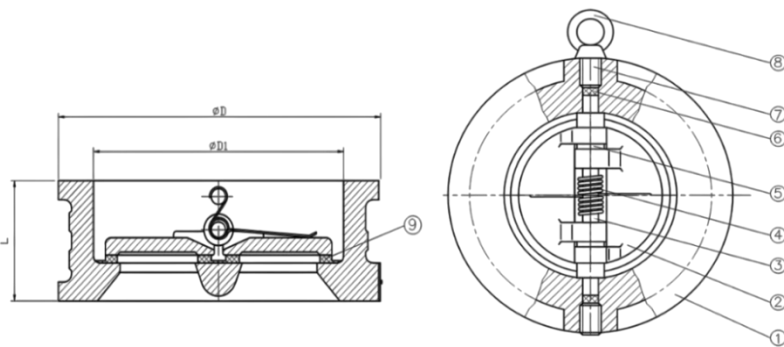

PRODUCTS STANDARDS

Design	DIN3202, BS5153, EN12334/EN16767
Face to face	EN558-1
Test	EN 12266-1
Working Pressure	PN10/PN16/PN25
Max Temp.	80°C

NO. MAIN PART MATERIAL

NO.	MAIN PART	MATERIAL
1	Seal	NBR/EPDM
2	Body	Ductile Iron / SS304 / SS316
3	Disc	DI /CF8/ CF8M
4	Hinge Pin	SS410
5	Spring	SS304/ SS316
6	Washer	PTFE
7	Rubber strip	NBR/ EPDM
8	Plug	C.S / SS304
9	Eyebolt	C.S / SS304
10	Seat	NBR/ EPDM

DN	L		ØD					ØD1
	DIN	150 LB	PN6	PN10/PN16	150 LB	5K	10K	
40	43	60	84	92	82		85	57
50	43	60	95	107	102	90	101	65
65	46	67	114	127	121	115	121	80
80	64	73	130	142	133	125	131	94
100	64	73	150	162	171	146	156	117
125	70	86	180	192	193	181	187	145
150	76	98	205	218	219	211	217	170
200	89	127	260	273	276	257	267	224
250	114	146	315	328	336	322	330	265
300	114	181	371	378	406	362	375	310
350	127	184	421	438	442	448	410	420
400	140	191	471	489	495	511	470	483
450	152	203	526	539	555	546	530	538
500	152	219	576	594	617	603	580	593
600	178	222	678	695	734	714	688	697
700	229		783	804	810	828		807
750	305			864	864	879		867
800	241		888	911	917	936		917

Designs and specifications shown are subject to change without notice due to our continuing program of product development.