


RUBBER EXPANSION JOINT – MODEL: FIG06
Double Sphere with F/F threaded ends

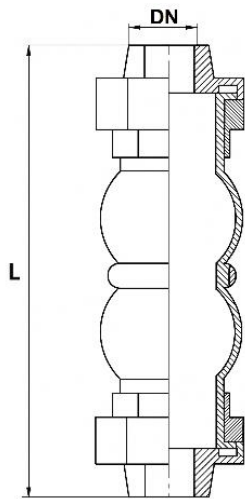

PRODUCTS STANDARDS

Design	BS / DIN / EN/ ISO
Thread	BSPT / BSPP / NPT
Test	EN 12266-1
Working Pressure	PN10/PN16/PN25
Max Temp.	80°C

NO.	MAIN PART	MATERIAL
1	Body	EPDM/NBR
2	Reinforcement Fabric	NYLON TIE CORD
3	Threaded ends	C.S /SS304

(inch)	DN	L	Axial Displacement		Lateral Displacement	Angle of deflection
			Compression	Stretch		
½	15	200	22	6	22	20°
¾	20	200	22	6	22	20°
1	25	200	22	6	22	20°
1 ¼	32	200	22	6	22	20°
1 ½	40	200	22	6	22	20°
2	50	200	22	6	22	20°
2 ½	65	240	22	6	22	20°
3	80	240	22	6	22	20°

Designs and specifications shown are subject to change without notice due to our continuing program of product development.