


**FLANGE TYPE S.S FLEXIBLE JOINT – MODEL: FIG07**

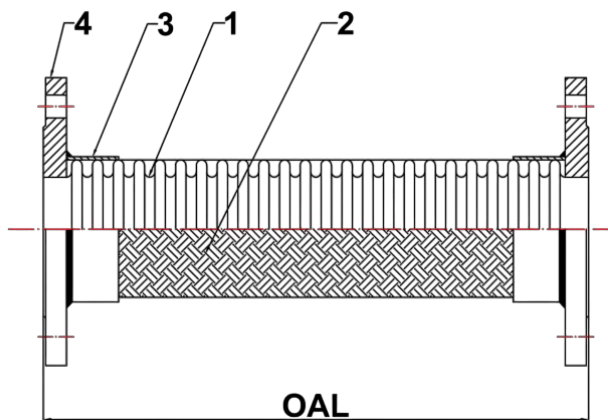

**PRODUCTS STANDARDS**

Design	ISO / EN / DIN
Flange	EN 1092 / BS4504
Length (OAL)	300 / 500 mm
Working Pressure	PN10/PN16/PN25
Max Temperature	250°C
Applicable Fluid	Oil, Water, Hot Water, Steam, Gas, Air.

NO.	MAIN PART	MATERIAL
1	Flexible Tube	SS304 / SS316
2	Braid	SS304 / SS316
3	Collar	SS304 / SS316
4	Flange	SS304 / SS316 / C.S

**Note:**

- 1) The size, total length and pressure tabulated above are standard. We can also produce products according your requirement.
- 2) Flange: JIS, ANSI, DIN, B.S., JB and etc

Nominal Diameter A (Inch)	O. D.(mm)	Min. BendingRadius(mm)	Max. Static Lateral Movement	
			300mm OAL	500mm OAL
			Eccentric (mm)	
50	73.6	350	7	49
65	88	410	6	42
80	102	450	4	34
100	128	560	3	27
125	155	660	3	23
150	185	815	2	18
200	235	1015	1	13
250	286	1220	--	11
300	340	1420	--	9

Designs and specifications shown are subject to change without notice due to our continuing program of product development.