


UNION TYPE S.S FLEXIBLE JOINT – MODEL: FIG07

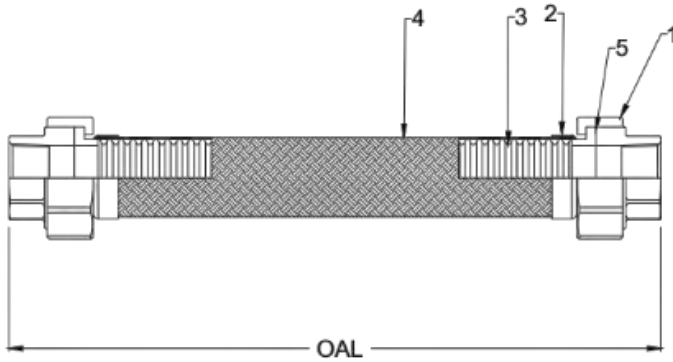

PRODUCTS STANDARDS

Design	ISO / EN / DIN
Thread	BSPT, BSPP, NPT
Length (OAL)	300/500 mm
Working Pressure	PN16/PN25
Max Temperature	250°C

NO.	MAIN PART	MATERIAL
1	Union	C.S / SS304 / SS316
2	Ring Cover	SS304 / SS316
3	Flexible Tube	SS304 / SS316
4	Wire Braid	SS304 / SS316
5	Gasket	SYNTHETIC RUBBER/ PTFE

DN (mm)	ID (mm)	Bellows OD (mm)	Max working pressure (MPa)
15	13.5	19.5	1.6
20	20	27	1.6
25	27	34.5	1.6
32	32	40	1.6
40	39.6	52	1.6
50	49.7	62	1.6

Designs and specifications shown are subject to change without notice due to our continuing program of product development.