
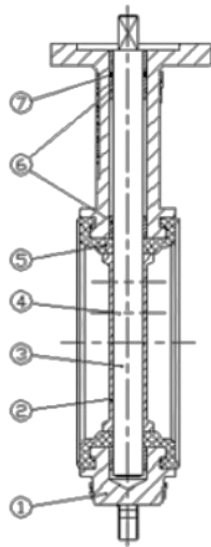


**SIGNAL ELECTRICAL BUTTERFLY VALVE – MODEL: FIG20**

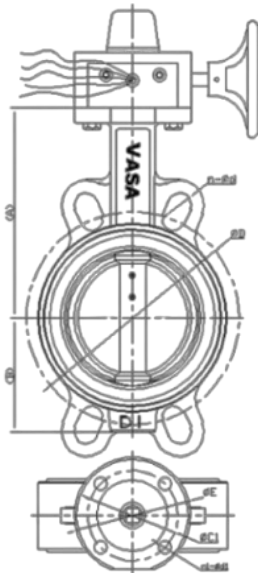

**PRODUCTS STANDARDS**

Design	BS5155 / API609 / BS EN593
Test	12266-1
Working Pressure	PN10/PN16
Max. Temperature	80°C

NO.	MAIN PART	MATERIAL
1	Body	DUCTILE IRON
2	Disc	SS304 / SS316
3	Seat	SYNTHETIC RUBBER
4	Stem	SS304 / SS420
5	Tapper Pin	SS304
6	Bolts and Nuts	SS304
7	Signal Device	DUCTILE IRON

DN	HA	HB	HC	L	ØA	PN10		PN16	
						ØC	n-Ø	ØC	n-Ø
50	66	130	30	45	12.7	125	4-18	125	4-18
65	75	140	30	48	12.7	145	4-18	145	4-18
80	95	150	30	49	12.7	60	4-18	160	8-18
100	107	170	30	55	15.8	180	8-18	180	8-18
125	122	185	30	58	19.0	210	8-18	210	8-18
150	134	205	30	59	19.0	240	8-23	240	8-23
200	168	235	36	64	22.2	295	8-23	295	12-23
250	200	270	36	70	28.6	350	12-23	355	12-27
300	237	305	36	80	31.8	400	12-23	410	12-27

Designs and specifications shown are subject to change without notice due to our continuing program of product development.