
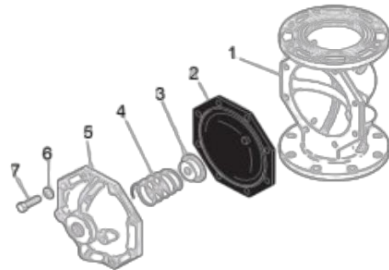


DELUGE VALVE – MODEL: FIG16

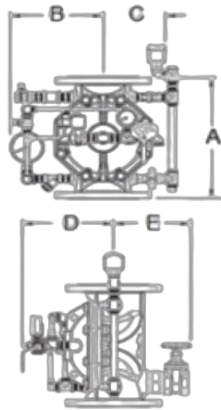

PRODUCTS STANDARDS

Design	EN / BS / DIN
Flange	EN 1092-2
Face to face	EN558-1
Tests	EN 12266-1
Working Pressure	PN10/PN16
Max. Temperature	80°C

NO.	MAIN PART	MATERIAL
1	Body	DUCTILE IRON
2	Diaphragm	SYNTHETIC RUBBER
3	Sring seat	STAINLESS STEEL
4	Spring	CARBON STEEL
5	Cover	DUCTILE IRON
6	Flat washer	CARBON STEEL
7	Hex bolt	CARBON STEEL

DN	A	B	C	D	E
50/65	280	190	180	98	190
80/100	330	205	90	108	202
125	400	230	215	125	250
150	400	230	215	140	250
200	508	255	240	168	280
250	650	320	290	203	341
300	736	380	360	230	390

Designs and specifications shown are subject to change without notice due to our continuing program of product development.